

FIG. 1




FIG. 2






FIG. 3




FIG. 4




FIG. 5





FIG. 6

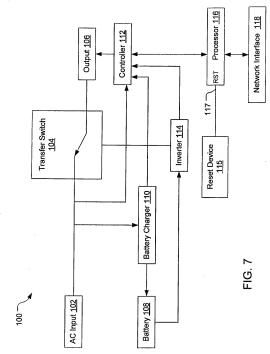

Replacement Sheet

FIG. 8

Onfiguration Medium	A See Marketance		
Seretivity • Medum Audibe Alam	sintenance		
Sensitivity © High © Medium Audibe Alarm	faintenance		APC Back-UPS HS 5
		About	Logoff
Audible Alarm	0 Low ~ 70	-70	
 e Enable O Disable → 	72		
Transfer Points Your battery badkup will interven of AC utility voltage goes above: Your battery badkup will interven of AC utility voltage goes above:	utility voltage goes above: utility voltage goes below:	139 ▼ Vofts ★ 92 ▼ Vofts ◆	
Outlet Control	O Reboot	Output 1	9/,
500 500 1-78	O Reboot	Output 3 Output 3	
Acriv 4		Reset 4	
Co	Configuration Page		

0 5

FIG. 10

+

Ele Edit Yow Facrites 12-de Ele	## Furthers Tools Help ### 15	e]APC Back-UPS HS 500 - Microsoft Internet Explorer	soft Internet Explorer				
About 8 500		Elle Edit View Favorites Tools	Lee				田
Configuration Maintenance About	Pac	98a× - @ - B B & @ - ×××8€	Search X2 Favorites 🔾 Medis	• @ B-BM-□8			
Bables Configuration Maintenance About rest: 159.216.22.160 60.03.87.250.4E cest: 100.03.87.250.0.E 60.03.87.250.0.E call Peanwiders APC Beack-UPS HS 500 minder: AB03431-7715 mere revision: 11h ne of manufacture (mind-54yyy): 10.021.2003 replacement date (mind-64yyy): 12.05.2003	About Abou	ddress 🔁 http://159.215.32.160/	TAXOUS COLUMN			100	% 1
Status Configuration Maintenance About A Perameters 1982 NS.22.160 1982 NS.22.160 Ideess: 00.00.87.2500 AE 00.00.87.2500 AE Identification of the properties o	Status Confouration Maintenance About Logarity Network Parameters 192,15,20,160 193,00,42	APC				APC Back-UPS HS 5	JPS HS 5
rs born: cleare (mm-cl-4yyy); cleare (mm-cl-5yyy);	Puddesa: 1992/15.20.160 Puddesa: 00.0037.2500.4E Modular Puddesa: 00.0037.2500.4E Pud	Status	Configuration	Maintenance	About	Logoff	
rs borc delatus (mm-dd-yyyy); f desie (mm-dd-yyyy);	P. Address: 1925.520 (60) M. Address: 00.00.87 2500.4E Therholian Pearmeters	Network Paramete	٤				
rs cor. t date (mm-d4-yyy);	MAC Address: 00.097.2900.4E Pedrhical Parameters	IP Address:		159.215.32.160			
re oor cachae (mm-cl-4777); ri date (mm-cl-5777);	Nodel: Model: Model: APC Back-UPS HS 500 APC Ba	MAC Address:		00.C0.87.250D.4E			
ion: acture (mm-dd-yyyy); if date (mm-dd-yyyy);	Model: APC Bear-LIPS HS 500 Seef a numerican: APC Bear-LIPS HS 500 Seef a numerican: 100 White firmware revision: 10 White firmware revision: 110 UPS date of manufacture (mm-dc-yyyy); 10-21-2003 Bettery replacement date (mm-dc-yyyy); 72-05-2003 About Page	Technical Paramet	ters				1
oor: t date (mm-dd-yyyy);	Senti number: A80431-17115 Firmware revision: 10 Web Emme revision: 11 UPS class of manufacture (mm-64-yyyy): 10-21-2003 Battery replacement date (mm-64-yyyy): 12-05-2003 About Page	Model:		APC Back-UPS HS 500			
ion: t date (mm-dd- _{J999}); t date (mm-dd- _{J999});	Firmware revision: 10 Web firmware revision: 11h Web firmware revision: 11h Web firmware revision: 10.21.2003 Battery replacement date (mm-45-yyy); 12-05-2003 Battery replacement date (mm-45-yyy); 12-05-2003 About Page	Serial number:		AB03431-17115			
	Web firmware revision: URS date of manufacture (mm-dd-yyyy); 10-21-2003 Battery replacement date (mm-dd-yyyy); 72-205-2003 About Page	Firmware revision:		10			
	UPS cale of manufacture (mm-d-byyy); 10.21-2003 Battery replacement date (mm-d-byyyy); 10.21-2003 About Page	Web firmware revis	sion:	ŧ			
	Battery replacement date (mm-dd-yyyy); 12-05-2003 About Page	UPS date of manu	ifacture (mm-dd-yyyy):	10-21-2003			
	About Page	Battery replaceme	int date (mm-dd-yyyy):	12-05-2003			
About Page		17		About Page			Γ
		DAbout Page				9	(1) Internet

<u>I</u>G. 11

ď




FIG. 12




FIG. 13